

oerlikon



TECHNICAL DATA

INLET CONNECTION - DN 25 ISO-KF
OUTLET CONNECTION - DN 16 ISO-KF
PUMPING SPEED (60hz) - 15.5 m³/h
ULTIMATE PRESSURE - 1.6 x 10⁻²mbar
NOISE LEVEL - ≤ 58 dB(A)
MOTOR RATING - 400 W
LEAK RATE - 1.0 x 10⁻⁶mbar l/s
DIMENSIONS (mm) - 372 x 288 x 397
WEIGHT - 25kg (55.2lbs)


We Can Rebuild & Service your SC 15 D.

A & J
VACUUM SERVICES, INC

OERLIKON
SC 15 D Dry Scroll Vacuum Pump

SALES & SERVICE 1-973-249-0854

Full
Manufacturer
Warranty

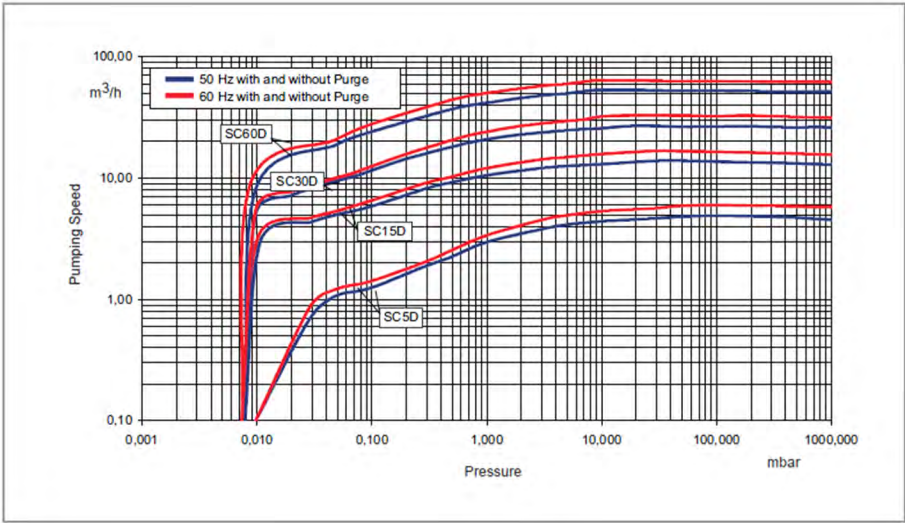

ISP APPLICATIONS

- LASER ENGINEERING
- ELECTRON BEAM WELDING
- LAMP MANUFACTURING
- SURFACE ANALYSIS INSTRUMENTS
- SCANNING ELECTRON MICROSCOPY
- SPECTROSCOPY
- SEMICONDUCTOR / LOAD LOCK
- LEAK DETECTION SYSTEMS
- ACCELERATORS

We Can Rebuild & Service your SC 15 D.

