



*We Can Rebuild & Service your ISP 250C VSD-250C.*

**ANEST IWATA**

ISP 250C DRY SCROLL PUMP MODULE

**TECHNICAL DATA**

DISPLACEMENT: 250 L/MIN (50HZ)

ULTIMATE PRESSURE: < 1.6 PA

LEAK TIGHTNESS: < 1 X 10<sup>-5</sup> PA M<sup>3</sup>/S

OUTPUT: 0.4 KW


VOLTAGE: AC 100V / 115V / 200V / 230V

INLET CONNECTION: NW 25

OUTLET CONNECTION: NW 16



**ANEST IWATA**  
**ISP 250C Dry Scroll Pump Module**  
SALES & SERVICE 1-973-249-0854

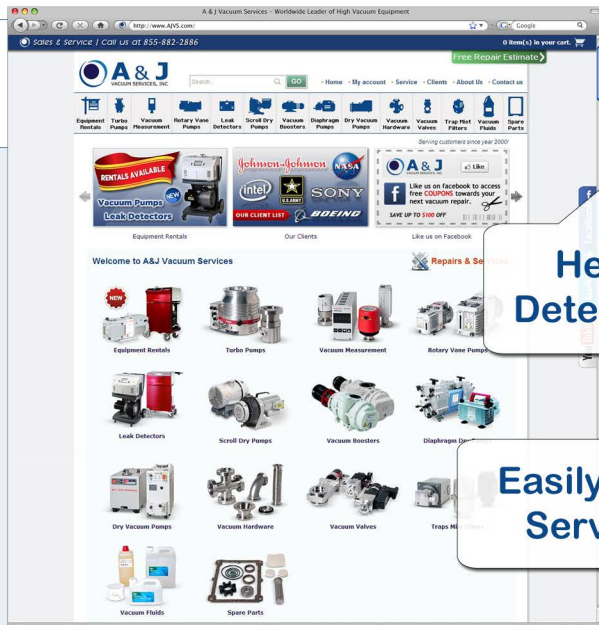

**www.AJVS.com**

**Helium Leak  
Detector Rentals**

**Free Repair Estimate  
on all Major Brands**

**Open 24-7**

**Easily Generate  
Service RMA**

**Large Selection of New  
and Refurbished High  
Vacuum Equipment**